



Log Cabins

Manufactured from kiln-dried timber, a Forest Log Cabin is the natural choice to create that extra outdoor living space. These traditional timber buildings will look great in any garden environment as well as giving you the space and freedom to enjoy the things you love.

Entertain and maintain

We know you'll be keen to start entertaining and using the space straightaway, but we strongly advise applying a solvent-based preservative treatment inside and outside soon after assembly. As the UK has a very wet climate it is important to ensure that the timbers remain dry and protected until such time as a treatment is applied.

Whilst the timber we use will change colour over time, simply re-apply a colour-based timber treatment regularly to maintain the look. Timber is a natural material which will shrink and expand due to its moisture content and the changing weather conditions. Any extreme changes should revert back over time.



PRECISION ENGINEERED

Our precision-engineered logs are manufactured with chalet-cut corners and a 6-sided joint to reinforce stability against the UK's wind and rain.



SUSTAINABLE TIMBER

The timber we use is slow grown Nordic Spruce, clear from the tight growth rings on the logs. It's also FSC® certified to ensure the sustainability and longevity of supply.

Expert insight

Visit our website to view videos on how to prepare a base and step by step guides to building your cabin.

SEE OUR LOG CABIN VIDEOS AT FORESTGARDEN.CO.UK



24KG POLYESTER FELT

An excellent value felt with a life expectancy of 15 years. Uses a weave of fibres giving it twice the tear resistance of mineral felt. Can be used as a single layer but increased performance is achieved by installing over an underlay felt.



34KG POLYESTER FELT

A higher grade version of the 24kg weight felt, with a thicker bitumen waterproof layer. This gives it even greater tear resistance and a life expectancy of 20 – 30 years. It is installed over an under-layer of breathable membrane.



FELT SHINGLES

An alternative to the Polyester Felt on Apex Roofed Log Cabins. Used in conjunction with a breathable membrane underlay, the shingles offer a different aesthetic to plain felt, giving a 'tiled' effect. Life expectancy of the Felt Shingles is 10 years.



DOORS & WINDOWS

All models come with adjustable door hinges and mortise lock mechanisms as standard, with opening windows available on most. Check specific models for details.

The doors on all Forest Log Cabins all have fixed windows. While some models are single glazed or have the option of single or double glazing, most are double glazed. All glass is toughened for safety and opening windows feature tilt & turn opening mechanisms.



ROOFS AND FLOORS

The roofs and floors in all our cabins are constructed from kiln-dried Tongue & Groove boards. Different roof felt options are available. We recommend the roof options that include underlay.



AVAILABLE THICKNESSES

Our Log Cabin range is available in three log thicknesses.


VISIT FORESTGARDEN.CO.UK FOR LATEST AVAILABILITY AND PRICING



The Harwood – 3m x 2m

220(h) x 320(w) x 232(d)cm with overhang

Windows: None
 Doors: Double
 Construction material: 28mm machined logs
 Glazing: Single glazed toughened glass
 Floor construction: 19mm Tongue & Groove
 Roof construction: 19mm Tongue & Groove
 Treatment: Untreated

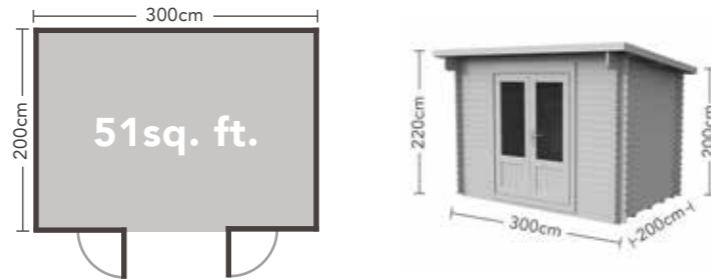

Roof Options

| | | | |
|-----------|---|--|--|
| | 24kg Polyester felt without underlay Single glazed | 24kg Polyester felt with underlay Single glazed | 34kg Polyester felt with underlay Single glazed |
| HD | VHAR28S32P2HD | VHAR28S32P2UHD | VHAR28S32P3UHD |
| IN | VHAR28S32P2HDIN | VHAR28S32P2UHDIN | VHAR28S32P3UHDIN |




▶ SEE OUR LOG CABIN VIDEOS AT FORESTGARDEN.CO.UK



The Elmley – 5m x 3m

242(h) x 524(w) x 337(d)cm with overhang

Windows: 3 opening, tilt & turn
 Doors: Double
 Construction material: 45mm machined logs
 Glazing: Double glazed toughened glass
 Floor construction: 19mm Tongue & Groove
 Roof construction: 19mm Tongue & Groove
 Treatment: Untreated

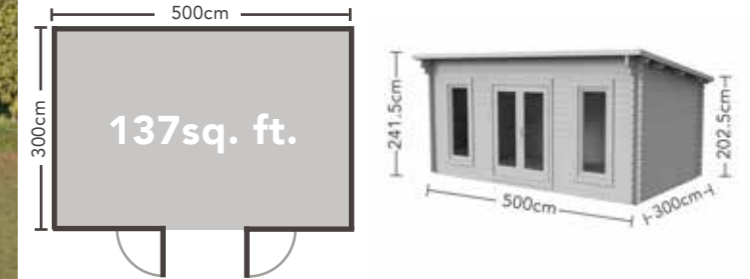

Roof Options


| | | | |
|-----------|---|--|--|
| | 24kg Polyester felt without underlay Double glazed | 24kg Polyester felt with underlay Double glazed | 34kg Polyester felt with underlay Double glazed |
| HD | VELM45D53P2HD | VELM45D53P2UHD | VELM45D53P3UHD |
| IN | VELM45D53P2HDIN | VELM45D53P2UHDIN | VELM45D53P3UHDIN |



The Chiltern – 4m x 3m

250(h) x 424(w) x 340(d)cm with overhang

Windows: 2 (opening), tilt & turn
 Doors: Double
 Construction material: 34mm machined logs
 Glazing: Single or Double glazed toughened glass
 Floor construction: 19mm Tongue & Groove
 Roof construction: 19mm Tongue & Groove
 Treatment: Untreated

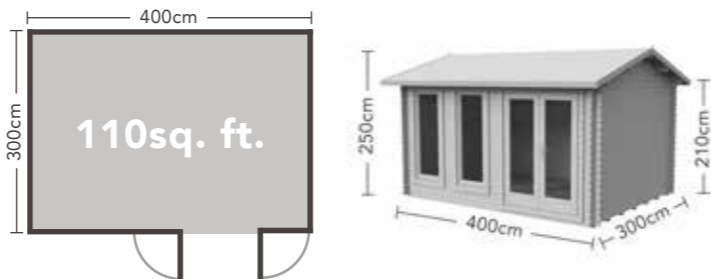

Roof & Glazing Options

| | | | |
|-----------|---|--|--|
| | 24kg Polyester felt without underlay Single glazed | 24kg Polyester felt with underlay Single glazed | Felt Shingles with underlay Single glazed |
| HD | VCHI34S43P2HD | VCHI34S43P2UHD | VCHI34S43SHHD |
| IN | VCHI34S43P2HDIN | VCHI34S43P2UHDIN | VCHI34S43SHHDIN |




| | | | |
|-----------|--|--|--|
| | 24kg Polyester felt with underlay Double glazed | 34kg Polyester felt with underlay Double glazed | Felt Shingles with underlay Double glazed |
| HD | VCHI34D43P2UHD | VCHI34D43P3UHD | VCHI34D43SHHD |
| IN | VCHI34D43P2UHDIN | VCHI34D43P3UHDIN | VCHI34D43SHHDIN |



The Mendip – 5m x 4m

242(h) x 524(w) x 466(d)cm with overhang

Windows: 3 opening, tilt & turn
 Doors: Double
 Construction material: 45mm machined logs
 Glazing: Double glazed toughened glass
 Floor construction: 19mm Tongue & Groove
 Roof construction: 19mm Tongue & Groove
 Treatment: Untreated

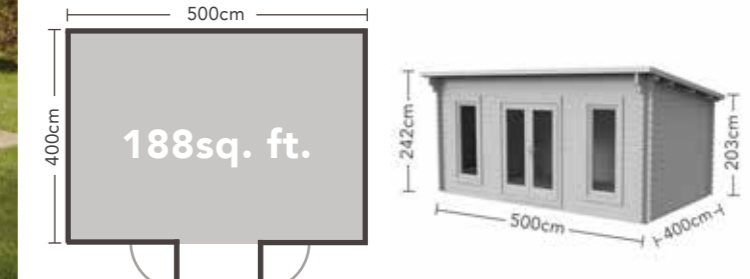

Roof Options

| | | | |
|-----------|---|--|--|
| | 24kg Polyester felt without underlay Double glazed | 24kg Polyester felt with underlay Double glazed | 34kg Polyester felt with underlay Double glazed |
| HD | VMEN45D54P2HD | VMEN45D54P2UHD | VMEN45D54P3UHD |
| IN | VMEN45D54P2HDIN | VMEN45D54P2UHDIN | VMEN45D54P3UHDIN |




www VISIT FORESTGARDEN.CO.UK FOR LATEST AVAILABILITY AND PRICING



The Rushock – 5m x 4m

247(h) x 524(w) x 434(d)cm with overhang

Windows: 4 opening
 Doors: Double
 Construction material: 45mm machined logs
 Glazing: Double glazed toughened glass
 Floor construction: 19mm Tongue & Groove
 Roof construction: 19mm Tongue & Groove
 Treatment: Untreated

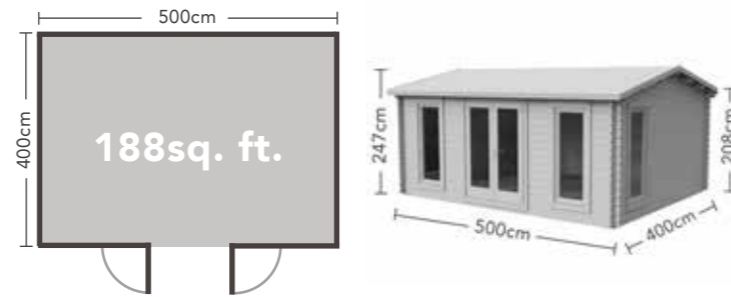

Roof Options

| | 24kg Polyester felt without underlay Double glazed | 24kg Polyester felt with underlay Double glazed | 34kg Polyester felt with underlay Double glazed |
|-----------|--|---|---|
| HD | VRUS45D54P2HD | VRUS45D54P2UHD | VRUS45D54P3UHD |
| IN | VRUS45D54P2HDIN | VRUS45D54P2UHDIN | VRUS45D54P3UHDIN |



Felt Shingles with underlay Double glazed

| | |
|-----------|-----------------|
| HD | VRUS45D54SHHD |
| IN | VRUS45D54SHHDIN |


SEE OUR LOG CABIN VIDEOS AT FORESTGARDEN.CO.UK



The Wolverley – 6m x 4m

242(h) x 624(w) x 466(d)cm with overhang

Windows: 5 opening, tilt & turn
 Doors: Double
 Construction material: 45mm machined logs
 Glazing: Double glazed toughened glass
 Floor construction: 19mm Tongue & Groove
 Roof construction: 19mm Tongue & Groove
 Treatment: Untreated

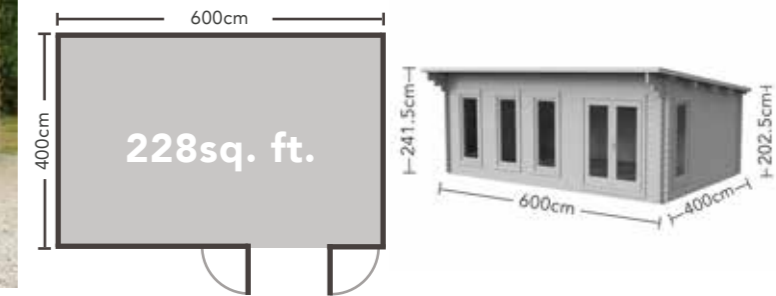

Roof Options


| | 24kg Polyester felt without underlay Double glazed | 24kg Polyester felt with underlay Double glazed | 34kg Polyester felt with underlay Double glazed |
|-----------|--|---|---|
| HD | VWOL45D64P2HD | VWOL45D64P2UHD | VWOL45D64P3UHD |
| IN | VWOL45D64P2HDIN | VWOL45D64P2UHDIN | VWOL45D64P3UHDIN |



The Arley – 6m x 3m

242(h) x 624(w) x 337(d)cm with overhang

Windows: 4 opening, tilt & turn
 Doors: Double
 Construction material: 45mm machined logs
 Glazing: Double glazed toughened glass
 Floor construction: 19mm Tongue & Groove
 Roof construction: 19mm Tongue & Groove
 Treatment: Untreated

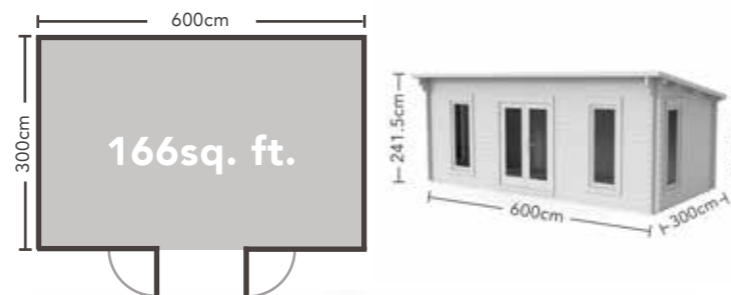

Roof Options


| | 24kg Polyester felt without underlay Double glazed | 24kg Polyester felt with underlay Double glazed | 34kg Polyester felt with underlay Double glazed |
|-----------|--|---|---|
| HD | VARL45D63P2HD | VARL45D63P2UHD | VARL45D63P3UHD |
| IN | VARL45D63P2HDIN | VARL45D63P2UHDIN | VARL45D63P3UHDIN |



The Blakedown – 6m x 4m

247(h) x 624(w) x 446(d)cm with overhang

Windows: 5 opening, tilt & turn
 Doors: Double
 Construction material: 45mm machined logs
 Glazing: Double glazed toughened glass
 Floor construction: 19mm Tongue & Groove
 Roof construction: 19mm Tongue & Groove
 Treatment: Untreated

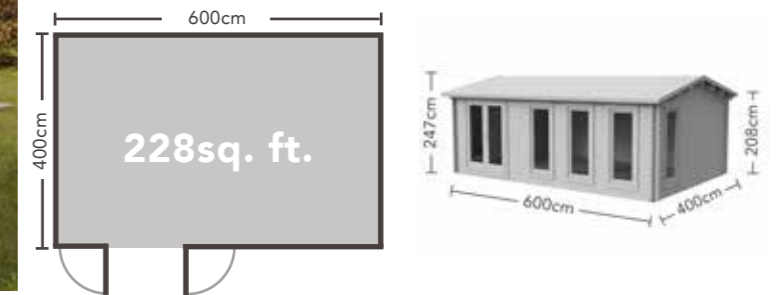

Roof Options

| | 24kg Polyester felt without underlay Double glazed | 24kg Polyester felt with underlay Double glazed | 34kg Polyester felt with underlay Double glazed |
|-----------|--|---|---|
| HD | VBLA45D64P2HD | VBLA45D64P2UHD | VBLA45D64P3UHD |
| IN | VBLA45D64P2HDIN | VBLA45D64P2UHDIN | VBLA45D64P3UHDIN |



Felt Shingles with underlay Double glazed

| | |
|-----------|-----------------|
| HD | VBLA45D64SHHD |
| IN | VBLA45D64SHHDIN |